


Item:

LPC-21774A-1-992

1-LIGHT MATTE BLACK SEMI-FLUSHMOUNT

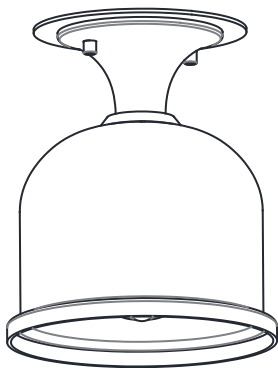

1

SAFETY INFORMATION

WARNING: Read all safety precautions and installation instructions carefully before installing or servicing this fixture. Failure to comply with these instructions could result in a potentially fatal electric shock, fire, and/or property damage.

IMPORTANT: lisez attentivement toutes les précautions de sécurité et les installations avant d'installer ou de réparer ce luminaire. Le non respect de ces instructions peut entraîner un choc électrique et / ou des dégâts matériels potentiellement fatals.

- To reduce the risk of electrical shock or other personal injury which could be hazardous or fatal, ensure the power is turned OFF at the fuse or breaker box before making any electrical connections or removing the old fixture.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- Must be connected to 120 volt, 60 Hz power source.
- Fixture may be directly mounted to the ceiling.
- NOT suitable for ground locations.
- Fixture should be installed by a qualified electrician or person experienced with household wiring. The electrical system, and method of electrical connection of the fixture, must be in accordance with the National Electrical Code and local building codes.

NOT INTENDED FOR USE WITH EMERGENCY EXITS! NOT SUITABLE FOR WET LOCATIONS! CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR! MINIMUM 75° C SUPPLY CONDUCTORS! NON PRÉVU POUR UNE UTILISATION AVEC DES SORTIES D'URGENCE! NON ADAPTÉ AUX LIEUX MOUILLÉS! CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR ASSURER UN CONDUCTEUR DE CIRCUIT DE BRANCHE APPROPRIÉ! CONDUCTEURS D'ALIMENTATION MINIMUM DE 75° C!

TOOLS REQUIRED (Not Included)(Cont.)



NOTE: Keep your receipt and these instructions for Proof of Purchase.



Ladder



Gloves




Phillips Screwdriver



Wire Stripper

SPECIFICATIONS

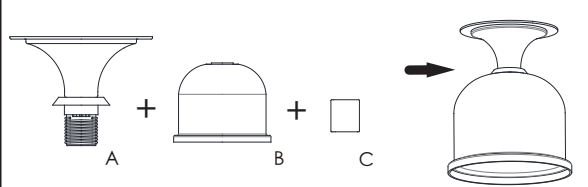
PARTS Note:Some parts (A, B & C) have been partially pre-assembled				HARDWARE			
				 D	 E	 F	 G
				 H	 I	 J	
A- Fixture Body (1) B- Glass Shade (1) C- Socket Ring (1)				D- Bulb (1)(Not Included) E- Screws (2) F- Screws (2) G- Wire Nuts (3) H- Mounting Plate (1) I- Cylinder Nuts (2) J- Nuts (2)			

2


INSTALLATION

CAUTION: Before beginning installation turn off the circuit breaker and light switch.

STEP 1: Carefully remove Parts A, B & C and hardware from the package.

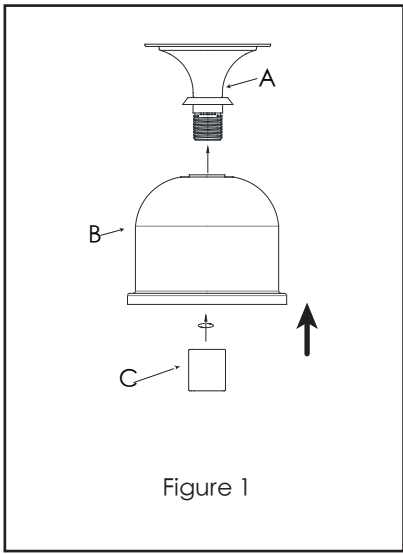


STEP 2: Secure glass shade (Part B) to socket of the fixture body (Part A) with socket ring (Part C). (Figure 1)

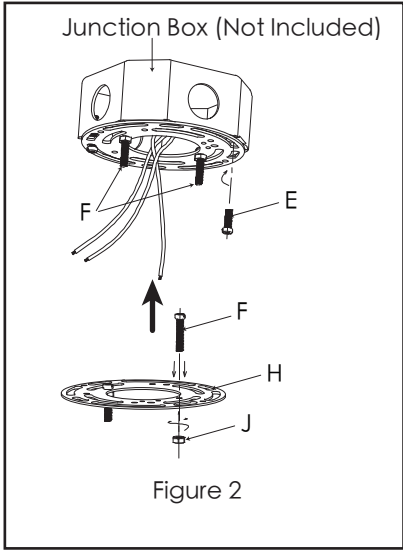

STEP 3: Fix the two screws (Part F) into the mounting plate (Part H). Fix the mounting plate (Part H) to the junction box (not included) and secure using two screws (Part E). (Figure 2)

INSTALLATION

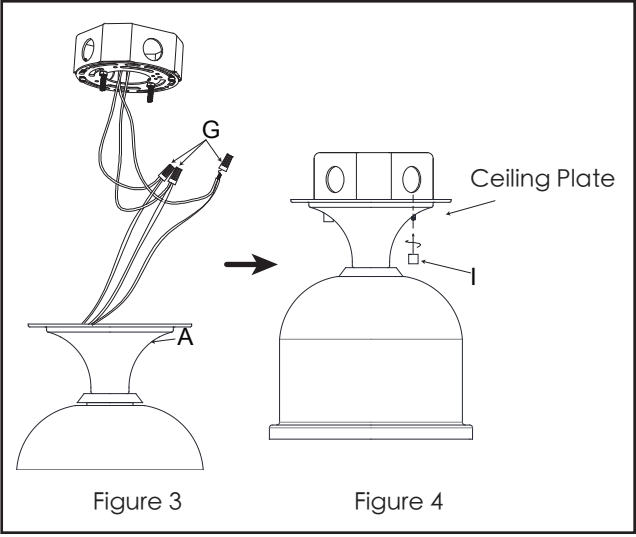

STEP 5: Straighten or cut the extra wires. Connect the AC wires of the fixture body (Part A) to the corresponding wires in the junction box and secure using wire nuts (Part G). Then secure ceiling plate of Part A to the screws (Part F) in the junction box using two cylinder nuts (Part I).(Figure 4)

Using wire nuts (Part G), connect the WHITE fixture wire to the WHITE supply wire from the junction box; connect the BLACK fixture wire to the BLACK supply wire from the junction box and house ground to the copper fixture wire.

RECOMMENDED: Wrap with each wire nut with electrical tape (not included).

STEP 6: Screw the 1 bulb (Parts D) into the socket of the fixture body (Part A). (Figure 5)

STEP 7: Restore power to the fuse box and turn light switch on to activate the fixture.

WARNING

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package,send an email to us for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.

3

4