

ABBA

LIGHTING USA

12V Landscape Light Specialist



STA07

INSTALLATION GUIDE

www.ABBALightingUSA.com

RATED VOLTAGE 12V AC/DC

Congratulations on your purchase of this high-quality product! We want to ensure that you have the best possible experience with it, so we kindly ask that you take a moment to carefully read and follow all instructions before assembly, installation, and use. By doing so, you'll not only guarantee correct function and safety, but also optimize the full potential of this exceptional product. Thank you for choosing us as your trusted provider of top-notch products - we truly appreciate your business!

IMPORTANT SAFETY INSTRUCTIONS

LIGHTEN LAMP IS **HOT!**

WARNING: TO REDUCE THE RISK OF FIRE OR INJURY TO PERSONS:

- ✔ Please exercise caution when using the lamp, as it tends to **HEAT** up rapidly. We recommend taking necessary safety measures to ensure optimal usage.
- ✔ For your safety, please refrain from touching the **HOT** lens, guard, or enclosure. We recommend waiting for the product to cool down before handling it.
- ✔ To prevent any fire hazards, please ensure that the lamp is kept away from materials that may easily catch fire. We appreciate your cooperation in maintaining a safe and secure environment.
- ✔ For safety reasons, we recommend that only a qualified professional install this electrical product.
- ✔ Before attempting to install this unit, ensure all power connections are off for your own safety.

WARRANTY

- We stand behind the quality of our product and offer a 2-year warranty from the date of purchase. Please note that the warranty is valid from the date of purchase, not from the date of installation. Kindly ensure that you keep the proof of purchase as it will be required for any warranty claims.
- Warranty will be void if there is any damage due to improper usage or modification to the fixture.
- Failure to comply with the instruction in this manual may increase the risk of damage or injury and will void warranty.

CAUTION:

fixture(s) must be installed in accordance with all local codes and ordinances.
Do not instal within 10 feet of a pool, spa or fountain

INSTALLATION INSTRUCTION

To ensure optimal performance and safety, it is important to use our fixtures ONLY with a low voltage landscape transformer. This transformer reduces the voltage from 120V to 12V, making it safe and suitable for outdoor use.

When installing the fixture(s), please follow these instructions carefully:

1. Before installation, please ensure that the power is turned off for your safety.

2. Hold the metal plate against the wall at the desired height and orientation. Ensure it is level and aligned according to your preferences.

3. Using a pencil or marker, carefully mark the screw hole locations on the wall through the holes in the metal plate.

4. Select an appropriately sized drill bit for the pilot holes, which should match the diameter of the screws you are using. It is recommended to use a bit slightly smaller than the screws to provide a secure grip.

5. Position the drill bit on each marked spot and gently drill pilot holes into the wall at the marked locations. Take care not to drill too deep, ensuring the depth matches the length of the screws.

6. To create the necessary hole for the back of fixture, Use a pencil or marker, carefully mark the hole on the wall use a drill bit or hole saw that matches the size of the provided metal plate. For concrete installation, utilize an outlet/junction box (not included) suitable for the purpose. Gently punch the hole on the deck or use the appropriate outlet/junction box (not included) for concrete surfaces. Exercise caution to maintain a clean and neat hole.

7. For concrete installation, To begin, construct conduit raceways inside the concrete formwork by using one-inch dowels and PVC pipe before pouring the concrete. After the concrete has cured, remove the dowels and proceed to finish the outer surface of each riser if you are installing it in stairs.

8. Place the metal plate against the wall, aligning the screw holes with the pilot holes you created.

9. Take the screws and insert them through the holes in the metal plate, one at a time. For deck installation, position the metal plate carefully within the hole.

10. If installing in concrete, secure the Step Light using the outlet/junction box (not included) you repaired earlier.

11. Using a screwdriver, tighten the screws gradually and evenly, ensuring a secure attachment of the metal plate to the wall. Be cautious not to overtighten and damage the wall surface.

- Confirm that the metal plate is firmly and evenly attached to the wall, without any wobbling or misalignment.
- Use a level to verify that the metal plate is horizontally or vertically aligned, as desired.

We recommend using **WN12** waterproof wire nuts (sold separately) for optimal connectivity.

12. Strip the insulation: Carefully strip approximately 3/4 inch (1.9 cm) of insulation from the ends of the two wires you wish to connect. Ensure that the bare metal ends are clean and free from any frayed strands.

13. Align the wires: Hold the stripped ends of the two wires together, aligning them neatly and ensuring that no stray strands are crossing over.

14. Insert the aligned ends of the wires into the wire nut, ensuring that they go all the way in. The bare ends should be completely covered by the wire nut. Twist the wire nut: Firmly twist the wire nut clockwise onto the wires, ensuring a secure connection. Continue twisting until the wire nut is tight and snug. It is recommended to apply electrical tape around the wire nuts and wires as an extra layer of protection.


15. Test the connection: Gently tug on each wire to ensure they are securely held by the wire nut.

16. Remember to test the fixture after making any adjustments to ensure it is functioning correctly and that the lighting is set to your preferences. To adjust the light temperature, simply locate the button positioned at the rear of the fixture and press it accordingly. This will allow you to choose from a range of temperature options, including 3000K, 4000K, and 5000K. .

17. To securely mount the fixture, carefully align the clips on the fixture with the corresponding slots on the metal plate. Apply gentle pressure to attach the fixture to the metal plate, ensuring a snug fit.

18. Once the fixture(s) have been installed securely, it's time to turn on the power and enjoy the enhanced lighting experience! Locate the power switch or breaker that controls the fixture(s) and turn it on. Take a moment to observe the lighting effect

Remember to regularly maintain and clean the fixture(s) to ensure optimal performance and longevity. Refer to the manufacturer's instructions for specific details on how to care for your particular fixture.

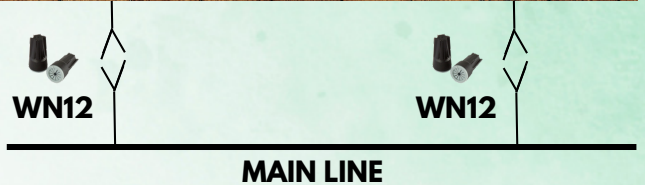

Attach the wires from the fixture(s) to the main cable, For best results, we recommend using WN12 waterproof wire nuts (which are sold separately)

