

# OUTDOOR LIGHTING

## INSTALLATION INSTRUCTIONS

### Path Light


- ⚠️ **WARNING:** To be installed by an electrician or qualified person only.
- ⚠️ **CAUTION:** Turn circuit breaker(s) off or remove fuse(s) before installation.  
Fixture(s) must be installed in accordance with all local codes and ordinances.  
Do not install within 10 feet of a pool, spa or fountain.

SUITABLE FOR MOUNTING WITHIN 1.2M(4FT.) OF THE GROUND.

SUITABLE FOR WET LOCATIONS.

This is a low voltage fixture for use with a maximum of 25A ,15v power units.

A remote transformer is required. The main cable from the power units should be buried for less than 6 inches under the ground level and can be purchased from Evergreen Outdoor a Division of Orbit Industries,Inc.

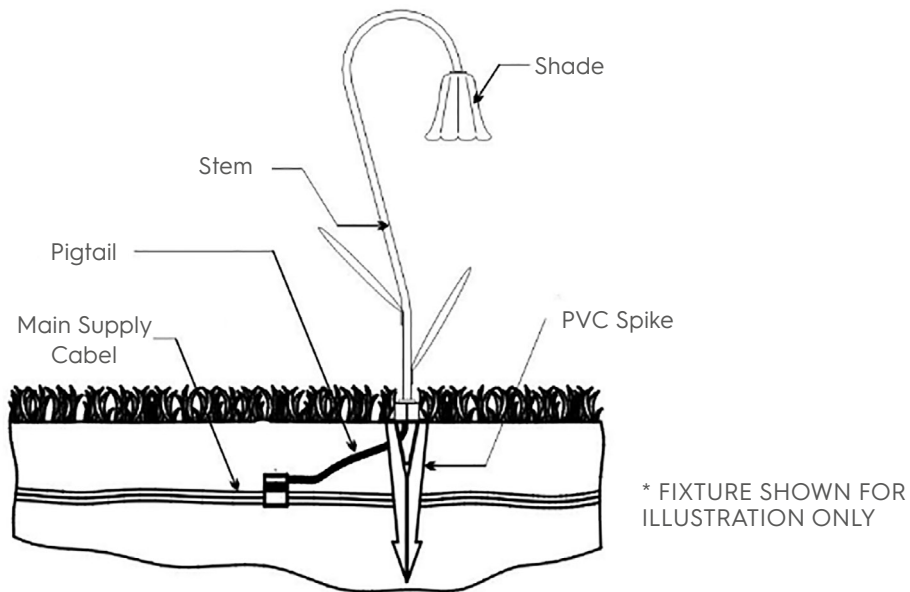

#### LUMINAIRE MOUNTING (with PVC Spike)

1. Run wire pigtail from luminaire through the mounting hole in top of PVC Spike.
2. Thread PVC Spike (PC58) into fixture.
3. Place PVC Spike in desired position and insert into ground until Flange of PVC Spike is flushed to grade level.
4. Attached fixture(s) wires pigtail to main supply cable with Connector(not provided) suitable for direct burial.
5. Provide power to the luminaire and check for proper operation.

# OUTDOOR LIGHTING

## INSTALLATION INSTRUCTIONS

### Path Light

#### IMPORTANT SAFETY INSTRUCTIONS THE LIGHTED LAMP IS HOT!!!

WARNING: TO REDUCE THE RISK OF FIRE, OR INJURY TO PERSONS:

1. Turn off/unplug and allow to cool before replacing lamp.
2. Lamps get hot quickly!!! Contact only switch/plug when turning on.
3. Do not touch hot lens, guard or enclosure.
4. Keep lamp away from materials that may burn.
5. Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
6. Do not operate the luminaire fitting with a missing or damaged shield.

#### SAVE THESE INSTRUCTIONS

 LAMP INSTALLATION/REPLACEMENT:

CAUTION: Do not exceed maximum wattage marked on luminaire label.

1. To prevent electrical shock, disconnect transformer from Electrical supply before service.
2. Remove lens cover to expose lamp.
3. Replace lamp with correct wattage and type marked on fixture label.

NOTE: DO NOT touch lamp with bare hands.

Always use soft cloth or the plastic wrapping (if available) from lamp to handle the lamp.

---