


3 CCT & WATTAGE SELECTABLE GOOSENECK BARN LIGHT

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

The 3 CCT & Wattage Selectable Gooseneck Barn Light is designed for various applications, including sign lighting, barn lighting, awnings, porch lighting, and patio lighting. It is UL certified and comes with a 5-year warranty. Key features include 3 CCT and wattage selection, 270° vertical rotation, and a Lighting DIP switch for adjusting wattage, photocell, and CCT settings. The infrared sensor detects sunlight within the 820-1100nm range, and the fixture is rated IP65 for wet location use. The model operates at 120-277V with an adjustable power output of 30W, 40W, or 50W, delivering 6500, 5200, or 3900 lumens respectively, equivalent to a 100-150W light. With its tunable CCT and durable design, this gooseneck barn light offers versatility and efficiency for various outdoor lighting needs.



DIMENSION

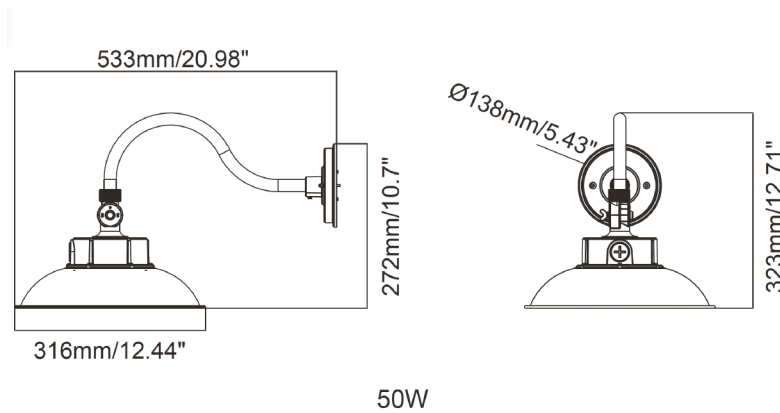

TECHNICAL SUMMARY

MODEL NO.	WATTAGE	LUMENS	CCT	VOLTAGE	DIMMING	CRI	CERTIFICATION
MGN-30/40/50W-3CCT	30/40/50W	3900/5200/6500LM	30/40/50K	120-277V	N/A	80+	UL

PART NUMBER ORDERING SUMMARY

MGN-30/40/50W-3CCT

Gooseneck Barn Light
MW Lighting

30/40/50W
Wattage

30/40/50K
CCT



MGN Series



3 CCT & WATTAGE SELECTABLE GOOSENECK BARN LIGHT

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

- Unit includes heavy duty metal frame

OPTICS

- Diffuse for uniform illumination.
- CRI 80

DRIVER

- 120 - 277V 60Hz universal input voltage
- 0 - 10v smooth flicker free dimming down to 5%

MOUNTING

Mount to the wall, etc.

LISTING

- UL 8750 LED equipment in Lighting Products

WARRANTY

5 years manufacturer warranty, consult www.mwledlighting.com for more details.

* Terms and conditions may apply.

*5 years limited LED luminaire warranty to the original purchaser that the luminaire shall be free from defects in materials and workmanship from date of shipment, when under properly installed at normal conditions of use. The warranty may not cover physical damage or abuse under certain conditions.

HIGHLIGHT



270° Vertical Rotation

Allows flexible positioning for optimal lighting coverage.

Integrated with Photocell

Automatically turns the light on at dusk and off at dawn, providing hands-free operation and energy saving.